


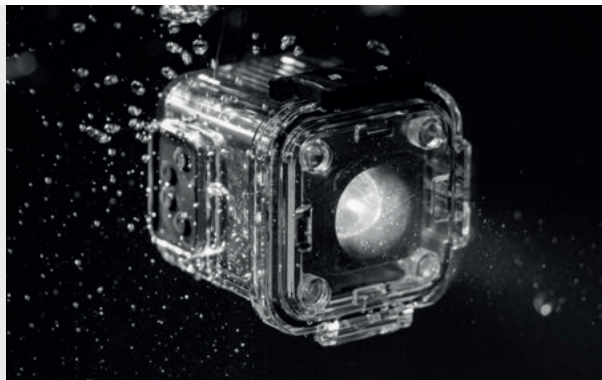

WWW.NANLUX.COM

Official Distributor

NANLUX
INNOVATE · ILLUMINATE

KAISER[®]
FOTOTECHNIK

www.kaiser-fototechnik.de

Brand Concept



Dedicated to creating more high-quality products that are more professional, simpler and faster setup for movie, TV, broadcast and media applications.

The rising expectations in modern professional lighting systems are seeking new levels of control, precision and customization. From compatibility in wireless protocols to ever expanding flexibility to help achieve new levels of creativity.

The evolution of 21st century productions have inspired products and methods to provide convenience and time saved on set - simpler and faster setup, intelligentization for storing repeatable scene settings for later use.

NANLUX, as a professional lighting brand, through its parent company – NANGUANG, listens to the needs from our active and creative customers to help push the envelope of what is possible. With more than 30 years of experience, we have the expertise to make professional clients' requests a reality through our product lines.

The future is unknown, but Nanlux will be there on the cutting edge of what is possible!

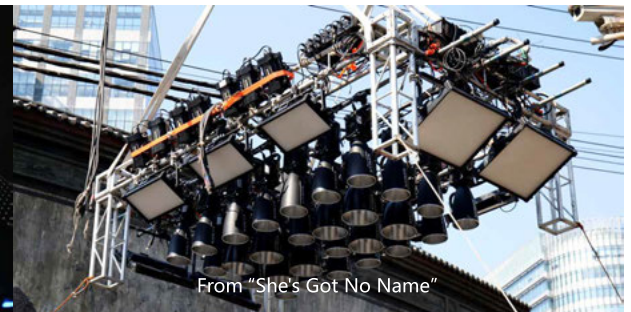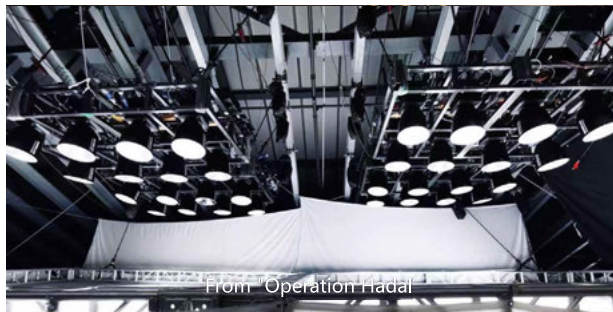

CONTENTS

01-30 Evoke Series LED Spot Light

31-34 Matrix Series LED Multi-source Spot Light

Evoke Series LED Spot Light


A New Breakthrough



Evoke 5C



1. Tiny and lightweight, measures just 5.6 × 4.4 × 4.5cm, weighs only 160g
2. Equipped with Nebula C8 Color Light Engine
3. Industry's widest CCT range of 1,000K–20,000K with ±200 green/magenta adjustment
4. Excellent color rendition with CRI average 98, TLCI average 98
5. IP67-rated durable metal body
6. Comprehensive accessory ecosystem: 14 dedicated accessories with magnetic design
7. Built-in battery, supports USB-C, Battery Grip, E27 Adapter, or 8-Light Kit Case power

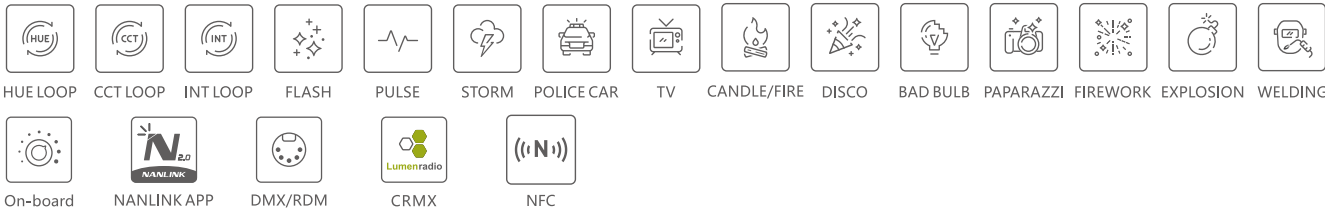

Brightness	100%	1%
Battery Runtime	50 mins	2 hours 36 mins

Includes

Evoke 5C × 1, USB-C Cable × 1, Magnetic Diffuser × 1, Magnetic Yoke × 1, Magnetic Thermal Shield × 1, User Manual × 1, Carrying Bag × 1

Evoke 5C KIT: Evoke 5C × 1, USB-C Cable × 1, Magnetic Diffuser × 1, Magnetic Fresnel Lens × 1, Magnetic Soft Dome × 1, Magnetic Barndoor × 1, Magnetic Snoot × 1, Magnetic Thermal Shield × 1, Magnetic Battery Grip × 1, User Manual × 1, Carrying Bag × 1

Evoke 5C 8KIT: Evoke 5C × 8, Magnetic Diffuser × 8, Magnetic Fresnel Lens × 4, Magnetic Soft Dome × 4, Magnetic Barndoor × 4, Magnetic Snoot × 4, Magnetic Spot Beam Lens × 2, Projection Attachment 15°-35° × 2, Gobo × 8, Magnetic Yoke × 4, Magnetic Thermal Shield × 8, Magnetic Battery Grip × 4, Magnetic E27 Socket Adapter × 4, Magnetic CRMX Module × 8, 5/8" Baby Pin with 1/4"-20 Thread × 4, AC Power Cable 1.5m × 1, D-tap Cable × 1, User Manual × 1, GUTEK T-230 Protector Case × 1 (Black)

Lighting Modifier Kit: Magnetic Barndoor × 1, Magnetic Snoot × 1, Magnetic Soft Dome × 1

Model	Evoke 5C
Rated Power	6W
Input Voltage / Current	DC 5V/2A
CCT	1,000K-20,000K (G/M±200)
CRI / TLCI	Average 98 / Average 98
TM-30	Rf: Average 96 / Rg: Average 100
Dimming	0%-100%, by 1% increment
IP Rating	IP67
Control	On-board, Nanlink App, DMX/RDM*, LumenRadio CRMX**, NFC (*via USB-C to DMX Adapter Cable, **via Magnetic CRMX Module)
Battery Runtime	100% brightness: 50 mins 1% brightness: 2 hours 36 mins
Product Size	Light Fixture: 56 × 44 × 45mm / 2.2 × 1.73 × 1.77" Magnetic Yoke: 67 × 42 × 69mm / 2.64 × 1.65 × 2.72"
Product Weight	Light Fixture: 0.16kg / 0.353lb Magnetic Yoke: 0.062kg / 0.137lb

Illumination (lux / fc)

CCT	3200K		5600K		R		G		B	
Distance	0.5M	1M	0.5M	1M	0.5M	1M	0.5M	1M	0.5M	1M
Light Only	1835 lux 170 fc	448 lux 42 fc	2026 lux 188 fc	496 lux 46 fc	308 lux 29 fc	73 lux 7 fc	2755 lux 256 fc	671 lux 62 fc	404 lux 38 fc	99 lux 9 fc
With Fresnel Lens (25°)	3630 lux 337 fc	750 lux 70 fc	4020 lux 373 fc	830 lux 77 fc	595 lux 55 fc	123 lux 11 fc	5390 lux 501 fc	1127 lux 105 fc	779 lux 72 fc	164 lux 15 fc
With Fresnel Lens (35°)	2296 lux 213 fc	518 lux 48 fc	2533 lux 235 fc	580 lux 54 fc	385 lux 36 fc	86 lux 8 fc	3450 lux 321 fc	796 lux 74 fc	505 lux 47 fc	114 lux 11 fc
With Magnetic Spot Beam Lens	9710 lux 902 fc	2548 lux 237 fc	10770 lux 1001 fc	2828 lux 263 fc	1622 lux 151 fc	416 lux 39 fc	14910 lux 1385 fc	3870 lux 360 fc	2176 lux 202 fc	557 lux 52 fc
With Projection Attachment (15°)	3050 lux 283 fc	656 lux 61 fc	3380 lux 314 fc	726 lux 67 fc	515 lux 48 fc	111 lux 10 fc	4610 lux 428 fc	974 lux 90 fc	682 lux 63 fc	145 lux 13 fc
With Projection Attachment (35°)	1156 lux 107 fc	207 lux 19 fc	1278 lux 119 fc	229 lux 21 fc	195 lux 18 fc	35 lux 3 fc	1724 lux 160 fc	312 lux 29 fc	255 lux 24 fc	46 lux 4 fc

Evoke 150C

1. Equipped with Nebula C8 Color Light Engine
2. Industry's widest CCT range of 1,000K–20,000K with ± 200 green/magenta adjustment
3. Superior illuminance 22,230 lux @1m (5600K, with 45° reflector)
4. Excellent color rendition with CRI average 98, TLCI average 98
5. Various lighting modes: CCT, HSI, RGBW, XY coordinates, gel, effect
6. All-in-one design weighs only 2.65kg/5.84 lb (with yoke)
7. Constructed with high-strength magnesium alloy and IP66-rated housing
8. Compatible with FE mount and FM mount accessory ecosystem




V-mount Battery	14.8V 133Wh	14.8V 133Wh	14.8V 155.4Wh	26V 270Wh
Brightness	100%	75%	100%	100%
Runtime	14 mins	45 mins	52 mins	88 mins

Includes

Evoke 150C × 1, Yoke × 1, RF-FE-45 FE Mount Reflector 45° × 1, AC Power Cable 4.5M × 1, 5/8" Baby Pin with Quick Release Plate × 1, D-Tap Cable × 1, USB Flash Drive × 1, AS-MB-1 Magnetic Base × 1, User Manual × 1, Carrying Bag × 1

Evoke 150C 2KIT: Evoke 150C × 2, Yoke × 2, RF-FE-45 FE Mount Reflector 45° × 2, AC Power Cable 4.5m × 2, 5/8" Baby Pin with Quick Release Plate × 2, D-Tap Cable × 2, USB Flash Drive × 1, AS-MB-1 Magnetic Base × 2, FL-12 Fresnel Lens × 1, Rapid 60 Softbox × 1 (Standard Diffuser × 1, Medium Diffuser × 1, Eggcrate × 1), LS-186-5/8 Light Stand × 2, User Manual × 1, Plastic Trolley Case × 1

Evoke 150C 3KIT: Evoke 150C × 3, Yoke × 3, RF-FE-45 FE Mount Reflector 45° × 3, AC Power Cable 4.5m × 3, 5/8" Baby Pin with Quick Release Plate × 3, D-Tap Cable × 3, USB Flash Drive × 1, AS-MB-1 Magnetic Base × 3, FL-12 Fresnel Lens × 2, Rapid 60 Softbox × 2 (Standard Diffuser × 2, Medium Diffuser × 2, Eggcrate × 2), LS-186-5/8 Light Stand × 3, User Manual × 1, Trolley Case × 1

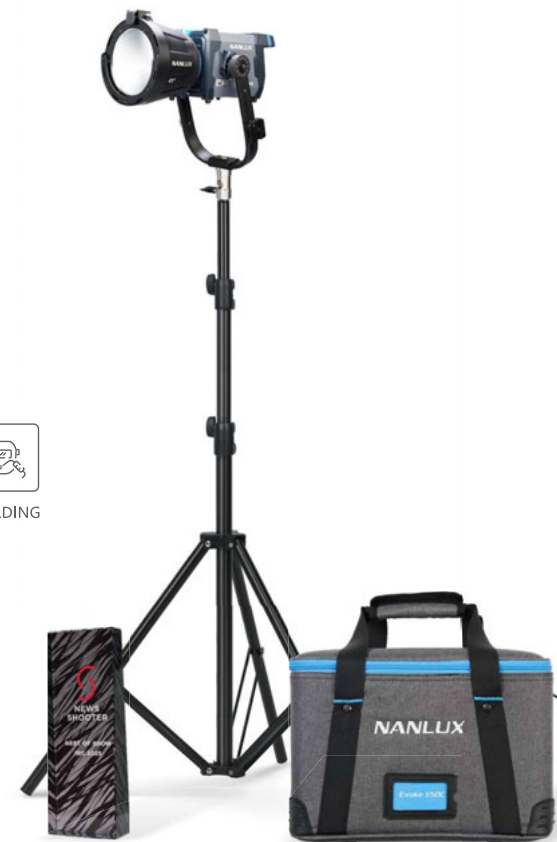


Model	Evoke 150C
Rated Power	150W
Input Voltage / Current	AC100-240V/50-60Hz, 2A Max; DC14.4-28V; PD3.0 (12-28V) 60W Min
CCT	1,000K-20,000K (G/M±200)
CRI / TLCI	Average 98 / Average 98
TM-30	Rf: Average 96 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP66
Control	On-board, Wired Controller, Nanlink App, Remote Controller, DMX/RDM*, LumenRadio CRMX, Art-Net/sACN*, NFC (*via the Extension Adapter)
Product Size	Light Fixture: 209.14 × 146.95 × 127.29mm / 8.23 × 5.79 × 5.01" Yoke: 282.46 × 226.32 × 89.21mm / 11.12 × 8.91 × 3.51"
Product Weight	Light Fixture: 2.11kg / 4.65lb Yoke: 0.54kg / 1.19lb

Illumination (lux / fc)

CCT	3200K			5600K			R			G			B		
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	12120 lux 1126 fc	2921 lux 271 fc	1320 lux 123 fc	12160 lux 1130 fc	2940 lux 273 fc	1328 lux 123 fc	1705 lux 158 fc	398 lux 37 fc	179 lux 17 fc	5680 lux 528 fc	1365 lux 127 fc	615 lux 57 fc	1600 lux 149 fc	386 lux 36 fc	174 lux 16 fc
With RF-FE-25 Reflector 25°	85400 lux 7934 fc	14030 lux 1303 fc	5570 lux 517 fc	83500 lux 7757 fc	13730 lux 1276 fc	5460 lux 507 fc	10160 lux 944 fc	1607 lux 149 fc	645 lux 60 fc	38700 lux 3595 fc	6300 lux 585 fc	2520 lux 234 fc	10920 lux 1014 fc	1784 lux 166 fc	712 lux 66 fc
With RF-FE-45 Reflector 45°	22640 lux 2103 fc	5000 lux 464 fc	2177 lux 202 fc	22230 lux 2065 fc	4950 lux 460 fc	2155 lux 200 fc	2604 lux 242 fc	548 lux 51 fc	238 lux 22 fc	10200 lux 948 fc	2256 lux 210 fc	982 lux 91 fc	2882 lux 268 fc	635 lux 59 fc	276 lux 26 fc
Distance	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
With FL-12E (15°)	104400 lux 9699 fc	9960 lux 925 fc	3450 lux 321 fc	105500 lux 9081 fc	10080 lux 936 fc	3490 lux 324 fc	14700 lux 1366 fc	1375 lux 128 fc	476 lux 44 fc	48800 lux 4534 fc	4570 lux 425 fc	1566 lux 145 fc	13810 lux 1283 fc	1280 lux 119 fc	439 lux 41 fc
With FL-12E (35°)	18830 lux 1749 fc	2130 lux 198 fc	773 lux 72 fc	19030 lux 1768 fc	2133 lux 198 fc	777 lux 72 fc	2715 lux 252 fc	298 lux 28 fc	110 lux 10 fc	9060 lux 842 fc	1019 lux 95 fc	371 lux 34 fc	2567 lux 238 fc	288 lux 27 fc	105 lux 10 fc
With FL-12 (15°)	88000 lux 8175 fc	9320 lux 866 fc	3280 lux 305 fc	88600 lux 8231 lux	9370 lux 870 fc	3310 lux 307 fc	12530 lux 1164 fc	1289 lux 120 fc	456 lux 42 fc	41500 lux 3855 fc	4320 lux 401 fc	1512 lux 140 fc	11740 lux 1091 fc	1223 lux 114 fc	427 lux 40 fc
With FL-12 (30°)	26520 lux 2464 fc	2978 lux 277 fc	1089 lux 101 fc	26620 lux 2473 fc	2994 lux 278 fc	1093 lux 102 fc	3790 lux 352 fc	431 lux 40 fc	157 lux 15 fc	12620 lux 1172 fc	1422 lux 132 fc	520 lux 48 fc	3610 lux 335 fc	406 lux 38 fc	143 lux 13 fc
With RF-FE-PB	22640 lux 2103 fc	15650 lux 1454 fc	5710 lux 530 fc	22230 lux 2065 fc	16120 lux 1498 fc	5820 lux 541 fc	2604 lux 242 fc	1998 lux 186 fc	755 lux 70 fc	10200 lux 948 fc	6940 lux 645 fc	2619 lux 243 fc	2882 lux 268 fc	1956 lux 182 fc	733 lux 68 fc

Evoke 600C

1. Equipped with Nebula C8 Color Light Engine
2. Industry's widest CCT range of 1,000K–20,000K with ± 200 green/magenta adjustment
3. Superior illuminance 20,820 lux @3m (5,600K, with 25° reflector)
4. Excellent color rendition with CRI average 98, TLCI average 98
5. Various lighting modes: CCT, HSI, RGBW, XY coordinates, gel, effect
6. All-in-one design weighs only 8.28kg/18.25 lb (with yoke)
7. Constructed with high-strength magnesium alloy and IP66-rated housing
8. Compatible with BE mount, Bowens mount, and NL mount accessory ecosystem

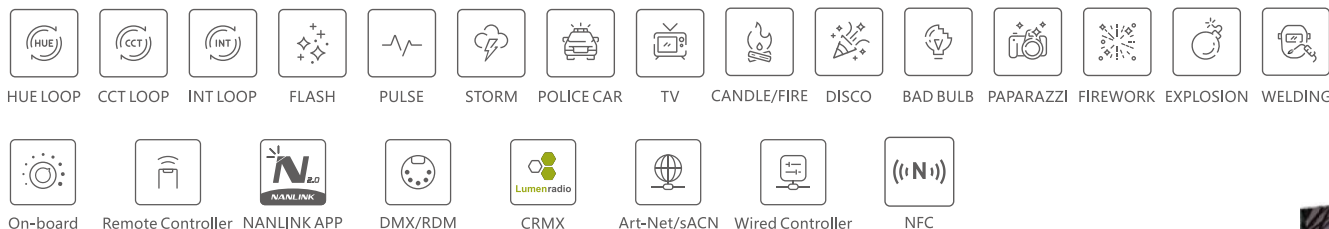

Includes

Evoke 600C × 1, Yoke × 1, RF-BE-25 BE Mount Reflector 25° × 1, AC Power Cable 6M × 1, USB Flash Drive × 1, AS-MB-2 Magnetic Base × 1, WC-EXT Wired Controller × 1 (Connection Cable 8m × 1, AS-MB-1 Magnetic Base × 1), User Manual × 2 (Evoke 600C+WC-EXT)

Evoke 600C KIT: Evoke 600C × 1, Yoke × 1, RF-BE-25 BE Mount Reflector 25° × 1, AC Power Cable 6m × 1, USB Flash Drive × 1, AS-MB-2 Magnetic Base × 1, WC-EXT Wired Controller × 1 (Connection Cable 8m × 1, AS-MB-1 Magnetic Base × 1), User Manual × 2 (Evoke 600C+WC-EXT), CC-ST-EV600C Trolley Case × 1


Model	Evoke 600C
Rated Power	600W
Input Voltage / Current	AC100-240V/50-60Hz, 8A Max; DC48V/12.5A
CCT	1,000K-20,000K (G/M±200)
CRI / TLCI	Average 98 / Average 98
TM-30	Rf: Average 96 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP66
Control	On-board, Wired Controller, Nanlink App, Remote Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN*, NFC (*via the Extension Adapter)
Product Size	Light Fixture: 358.2 × 246.3 × 205.33mm / 14.10 × 9.70 × 8.08" Yoke: 405 × 355.4 × 63.6mm / 15.94 × 14.0 × 2.50"
Product Weight	Light Fixture: 7.26kg / 16.01lb Yoke: 1.02kg / 2.25lb

Illumination (lux / fc)

CCT	3200K			5600K			R			G			B		
Distance	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
Light Only	22130 lux 2056 fc	2512 lux 233 fc	952 lux 88 fc	24620 lux 2287 fc	2754 lux 256 fc	1042 lux 97 fc	3790 lux 352 fc	421 lux 39 fc	158 lux 15 fc	13910 lux 1292 fc	1567 lux 146 fc	592 lux 55 fc	2109 lux 196 fc	236 lux 22 fc	89 lux 8 fc
With FL-22E (15°)	255700 lux 23755 fc	20070 lux 1865 fc	6750 lux 627 fc	282100 lux 26207 fc	22110 lux 2054 fc	7350 lux 683 fc	43200 lux 4013 fc	3230 lux 300 fc	1065 lux 99 fc	155800 lux 14474 fc	11890 lux 1105 fc	3990 lux 371 fc	24420 lux 2269 fc	1838 lux 171 fc	612 lux 57 fc
With FL-22E (50°)	27130 lux 2520 fc	2853 lux 265 fc	1082 lux 101 fc	29710 lux 2760 fc	3180 lux 295 fc	1190 lux 111 fc	4490 lux 417 fc	490 lux 46 fc	178 lux 17 fc	16910 lux 1571 fc	1813 lux 168 fc	680 lux 63 fc	2626 lux 244 fc	281 lux 26 fc	105 lux 10 fc
Distance	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M
With RF-BE-25 Reflector 25°	17610 lux 1636 fc	5780 lux 537 fc	2866 lux 266 fc	20820 lux 1934 fc	6810 lux 633 fc	3380 lux 314 fc	2326 lux 216 fc	771 lux 72 fc	380 lux 35 fc	11110 lux 1032 fc	3640 lux 338 fc	1810 lux 168 fc	1866 lux 173 fc	614 lux 57 fc	304 lux 28 fc
With RF-BE-45 Reflector 45°	6700 lux 622 fc	2400 lux 223 fc	1241 lux 115 fc	7740 lux 719 fc	2766 lux 257 fc	1429 lux 133 fc	904 lux 84 fc	330 lux 31 fc	168 lux 16 fc	4170 lux 387 fc	1490 lux 138 fc	772 lux 72 fc	679 lux 63 fc	242 lux 22 fc	125 lux 12 fc
With PJ-BM-19	15780 lux 1466 fc	5070 lux 471 fc	2484 lux 231 fc	17260 lux 1603 fc	5550 lux 516 fc	2715 lux 252 fc	2512 lux 233 fc	806 lux 75 fc	402 lux 37 fc	9690 lux 900 fc	3110 lux 289 fc	1530 lux 142 fc	1443 lux 134 fc	463 lux 43 fc	226 lux 21 fc
With PJ-BM-36	5480 lux 509 fc	1855 lux 172 fc	924 lux 86 fc	6010 lux 558 fc	2031 lux 189 fc	1014 lux 94 fc	893 lux 83 fc	298 lux 28 fc	150 lux 14 fc	3370 lux 313 fc	1140 lux 106 fc	569 lux 53 fc	512 lux 48 fc	173 lux 16 fc	86 lux 8 fc
With FL-20G (10°)	14900 lux 1384 fc	5090 lux 473 fc	2556 lux 237 fc	16400 lux 1524 fc	5600 lux 520 fc	2816 lux 262 fc	2373 lux 220 fc	807 lux 75 fc	413 lux 38 fc	8950 lux 831 fc	3060 lux 284 fc	1549 lux 144 fc	1383 lux 128 fc	473 lux 44 fc	238 lux 22 fc
With FL-20G (45°)	5820 lux 541 fc	2143 lux 199 fc	1137 lux 106 fc	6380 lux 593 fc	2355 lux 219 fc	1248 lux 116 fc	940 lux 87 fc	347 lux 32 fc	183 lux 17 fc	3590 lux 334 fc	1326 lux 123 fc	696 lux 65 fc	559 lux 52 fc	206 lux 19 fc	109 lux 10 fc
With RF-BE-PB	45800 lux 4225 fc	21860 lux 2031 fc	10920 lux 1014 fc	51300 lux 4766 fc	24400 lux 2267 fc	12100 lux 1124 fc	6700 lux 622 fc	3030 lux 281 fc	1537 lux 143 fc	25370 lux 2357 fc	12300 lux 1143 fc	6140 lux 570 fc	4130 lux 384 fc	1982 lux 184 fc	992 lux 92 fc

Evoke 900C Full color

1. Equipped with RGBLAC six color mixing system
2. Impressive brightness output 12,940 lux @3m (at 5600K, with 45°reflector)
3. Ultra-wide CCT range of 1,800K-20,000K with G/M $\pm$ 200 adjustment
4. Various lighting modes: CCT, Advanced HSI, RGBW, XY coordinates, gel, effect
5. Sturdy build quality with both fixture and power supply IP55 rated
6. Fully dimmable lighting from 0.0%-100% in ultra-precise 0.1% increment
7. Comprehensive wired and wireless control methods: On-board, Remote Controller, Nanlink App, Wired Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
8. Built-in 15 special effects with adjustable parameters

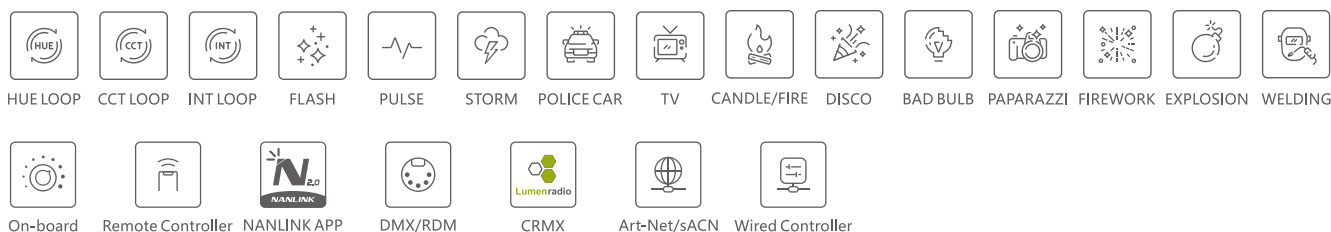

Includes

Evoke 900C × 1, Yoke × 1, Power Supply × 1, RF-NLM-45 Reflector 45° × 1, DC Connection Cable 7.5M × 1, AC Power Cable 6M × 1, USB Flash Drive × 1, AS-CP-QR-EV Quick Release Clamp × 1, W-RC-C2 Remote Controller × 1, User Manual × 1, CC-ST-EV900C Trolley Case × 1



Model	Evoke 900C
Rated Power	940W
Input Voltage / Current	DC 48V/18.75A Max, AC 100-240V 50/60Hz
CCT	1,800K-20,000K (G/M±200)
CRI / TLCI	Average 96
TM-30	Rf: Average 94 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wired Controller
Product Size	Light Fixture (without COB protective cap): 330 × 241 × 210mm / 13.0 × 9.5 × 8.3" Power Supply: 146 × 125 × 344mm / 5.7 × 4.9 × 13.5"
Product Weight	Light Fixture: 7.7kg / 16.98lb Power Supply: 4.5kg / 9.92lb

Illumination (lux / fc)

CCT	3200K			5600K			R			G			B		
Distance	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M
Light Only	4250 lux 395 fc	1656 lux 154 fc	925 lux 86 fc	4341 lux 403 fc	1688 lux 157 fc	945 lux 88 fc	800 lux 74 fc	300 lux 28 fc	173 lux 16 fc	1835 lux 170 fc	720 lux 67 fc	398 lux 37 fc	210 lux 20 fc	83 lux 8 fc	46 lux 4 fc
With RF-NLM-26 Reflector 26°	39530 lux 3672 fc	12300 lux 1143 fc	6036 lux 561 fc	40300 lux 3744 fc	12560 lux 1167 fc	6176 lux 574 fc	7020 lux 652 fc	2317 lux 215 fc	1121 lux 104 fc	16580 lux 1540 fc	5280 lux 491 fc	2562 lux 238 fc	1860 lux 173 fc	580 lux 54 fc	260 lux 24 fc
With RF-NLM-45 Reflector 45°	12810 lux 1190 fc	4404 lux 409 fc	2266 lux 211 fc	12940 lux 1202 fc	4501 lux 418 fc	2305 lux 214 fc	2266 lux 211 fc	842 lux 78 fc	402 lux 37 fc	5282 lux 491 fc	1854 lux 172 fc	958 lux 89 fc	530 lux 49 fc	180 lux 17 fc	102 lux 9 fc
With RF-NLM-60 Reflector 60°	8240 lux 765 fc	3038 lux 282 fc	1642 lux 153 fc	8541 lux 793 fc	3110 lux 289 fc	1693 lux 157 fc	1362 lux 127 fc	528 lux 49 fc	309 lux 29 fc	3528 lux 328 fc	1277 lux 119 fc	717 lux 67 fc	320 lux 30 fc	140 lux 13 fc	72 lux 7 fc
With FL-35YK (11°)	42540 lux 3952 fc	15100 lux 1403 fc	7898 lux 734 fc	43270 lux 4020 fc	15470 lux 1437 fc	8056 lux 748 fc	7920 lux 736 fc	2760 lux 256 fc	1407 lux 131 fc	17690 lux 1643 fc	6223 lux 578 fc	3256 lux 302 fc	2040 lux 190 fc	710 lux 66 fc	360 lux 33 fc
With FL-35YK (45°)	10160 lux 944 fc	3820 lux 355 fc	2057 lux 191 fc	10420 lux 968 fc	3923 lux 364 fc	2108 lux 196 fc	1788 lux 166 fc	681 lux 63 fc	352 lux 33 fc	4561 lux 424 fc	1720 lux 160 fc	915 lux 85 fc	520 lux 48 fc	199 lux 18 fc	102 lux 9 fc
With PJ-NLM-15-30 (15°)	32710 lux 3039 fc	10310 lux 958 fc	4978 lux 462 fc	32720 lux 3040 fc	10260 lux 953 fc	4952 lux 460 fc	6350 lux 590 fc	1982 lux 184 fc	952 lux 88 fc	14150 lux 1315 fc	4436 lux 412 fc	2118 lux 197 fc	1650 lux 153 fc	520 lux 48 fc	260 lux 24 fc
With PJ-NLM-15-30 (30°)	18920 lux 1758 fc	6577 lux 611 fc	3321 lux 309 fc	19090 lux 1773 fc	6630 lux 616 fc	3335 lux 310 fc	3594 lux 334 fc	1274 lux 118 fc	635 lux 59 fc	8195 lux 761 fc	2820 lux 262 fc	1417 lux 132 fc	960 lux 89 fc	330 lux 31 fc	165 lux 15 fc
Distance	10M	15M	20M	10M	15M	20M	10M	15M	20M	10M	15M	20M	10M	15M	20M
With RF-NL-PB	9450 lux 878 fc	3430 lux 319 fc	1989 lux 185 fc	9524 lux 885 fc	3415 lux 317 fc	1997 lux 186 fc	1634 lux 152 fc	615 lux 57 fc	352 lux 33 fc	3574 lux 332 fc	1317 lux 122 fc	761 lux 71 fc	450 lux 42 fc	160 lux 15 fc	95 lux 9 fc

Evoke 1200B Bi-color

1. Wide CCT range of 2,700K-6,500K
2. High illuminance of 18,570 lux @3m (5600K, with 45° reflector), comparable to 1.8kW PAR or 2.5kW HMI Fresnel
3. IP54 rating of both fixture and power supply
4. Comprehensive wired and wireless control methods: On-board, Remote Controller, NANLINK APP, Wired Controller, DMX/RDM, LumenRadio CRMX
5. Fully dimmable from 0-100% with 0.1% increment
6. Compatible with NL mount accessory ecosystem
7. Built-in 12 special effects with customizable parameters



HUE LOOP



INT LOOP



FLASH



PULSE



STORM



TV



CANDLE/FIRE



PAPARAZZI



BAD BULB



FIREWORK



EXPLOSION



WELDING



On-board



Remote Controller



NANLINK APP



DMX/RDM



CRMX



Wired Controller

Includes

Evoke 1200B × 1, Yoke × 1, Power Supply × 1, RF-NLM-45 Reflector 45° × 1, DC Connection Cable 7.5M × 1, AC Power Cable 6M × 1, AS-CP-QR-EV Evoke Quick Release Clamp × 1, USB Flash Drive × 1, WS-RC-C2 Remote Controller × 1, User Manual × 1, DMX Reference Guide × 1




Model	Evoke 1200B
Rated Power	1200W
Input Voltage / Current	DC 48V/25A Max, AC 100-240V 50/60Hz
CCT	2,700K-6,500K
CRI / TLCI	Average 96 / Average 97
TM-30	Rf: Average 95 / Rg: Average 102
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP54
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Wired Controller
Product Size	Light Fixture (with Yoke): 503 × 370 × 210mm / 19.8 × 14.56 × 8.26" Power Supply: 376.5 × 181 × 246mm / 14.82 × 7.12 × 9.68"
Product Weight	Light Fixture: 7.75kg / 17.09lb Yoke: 1.84kg / 4.06lb Power Supply: 10.5kg / 23.15lb

Illumination (lux / fc)

CCT	3200K			5600K		
Distance	3M	5M	7M	3M	5M	7M
Light Only	4571 lux / 425 fc	1955 lux / 182 fc	1088 lux / 101 fc	5258 lux / 488 fc	2244 lux / 208 fc	1261 lux / 117 fc
With RF-NLM-26 Reflector 26°	51950 lux / 4826 fc	16180 lux / 1503 fc	8035 lux / 746 fc	61030 lux / 5670 fc	18860 lux / 1752 fc	9377 lux / 871 fc
With RF-NLM-45 Reflector 45°	15900 lux / 1477 fc	5816 lux / 540 fc	3320 lux / 308 fc	18570 lux / 1725 fc	6800 lux / 632 fc	3872 lux / 360 fc
With RF-NLM-60 Reflector 60°	10210 lux / 949 fc	4117 lux / 382 fc	2382 lux / 221 fc	12240 lux / 1137 fc	4725 lux / 439 fc	2800 lux / 260 fc
With FL-35YK (11°)	43480 lux / 4039 fc	15610 lux / 1450 fc	8056 lux / 748 fc	49940 lux / 4639 fc	17810 lux / 1655 fc	9211 lux / 856 fc
With FL-35YK (45°)	11320 lux / 1052 fc	4603 lux / 428 fc	2693 lux / 250 fc	13010 lux / 1209 fc	5286 lux / 491 fc	3067 lux / 285 fc
With PJ-NLM-15-30 (15°)	29490 lux / 2740 fc	9180 lux / 853 fc	4397 lux / 408 fc	35010 lux / 3252 fc	10980 lux / 1020 fc	5231 lux / 486 fc
With PJ-NLM-15-30 (30°)	17360 lux / 1613 fc	5840 lux / 543 fc	3004 lux / 279 fc	20630 lux / 1917 fc	6993 lux / 650 fc	3561 lux / 331 fc
Distance	10M	15M	20M	10M	15M	20M
With RF-NL-PB	20810 lux / 1933 fc	7087 lux / 658 fc	3975 lux / 369 fc	25080 lux / 2330 fc	8607 lux / 800 fc	4706 lux / 437 fc

Evoke 2400B

1. Ultra high luminance of 41,910 lux @3m (at 5600K, with 45° reflector)
that comparable to a 10K Tungsten or 4K HMI light
2. Wide CCT range of 2,700K-6,500K with G/M $\pm$ 80 adjustment
3. Built with electronic contacts, enable modifier recognition function
4. IP55 of both fixture and power supply providing thorough protection
5. Fully dimmable from 0 to 100% with 0.1% increment
6. Adjustable cooling system includes Smart, Full Speed, Low Speed, Off mode
7. Comprehensive wired and wireless control methods: On-board, Remote Controller, NANLINK APP, Wired Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
8. Built-in 12 customisable practical effects

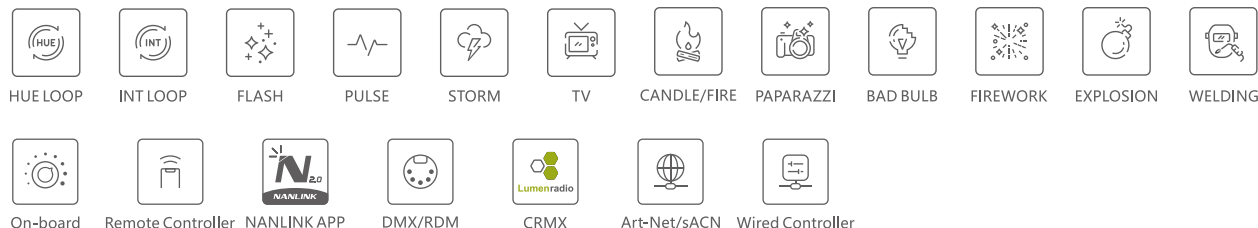

Includes

Evoke 2400B × 1, Yoke × 1, Power Supply × 1, USB Flash Drive × 1, AS-CP-QR-EV Quick Release Clamp × 1, WS-RC-C2 Remote Controller × 1, DC Connection Cable 7.5M × 1, AC Power Cable 2.5M+1M (for 220V countries/regions) × 1 or 3.5M AC Cable for Evoke 2400B × 1 + AC Cable (with bare ends) × 1 (for 110V countries/regions), User Manual × 1, RF-NL-L-45 Reflector 45° × 1, Carrying Bag (for reflector) × 1, CC-EV2400-FT-FO Flight Case × 1

Model	Evoke 2400B
Rated Power	2400W
Input Voltage / Current	DC48V/26A × 2, AC100V-240V 50/60Hz 26A Max
CCT	2,700K-6,500K (G/M±80)
CRI / TLCI	Average 96 / Average 97
TM-30	Rf: Average 95 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wired Controller
Product Size	Light Fixture (without COB protective cap): 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm / 15.3 × 6.8 × 10.6"
Product Weight	Light Fixture (without COB protective cap): 15kg / 33.1lb Power Supply: 11.58kg / 25.53lb

Illumination (lux / fc)

CCT	3200K			5600K		
Distance	5M	7M	10M	5M	7M	10M
Light Only	3478 lux / 323 fc	1848 lux / 172 fc	948 lux / 88 fc	3801 lux / 353 fc	2028 lux / 188 fc	1039 lux / 97 fc
With RF-NL-L-15 Reflector 15°	53800 lux / 4998 fc	30600 lux / 2843 fc	15600 lux / 1449 fc	61000 lux / 5667 fc	34100 lux / 3168 fc	17450 lux / 1621 fc
With RF-NL-L-30 Reflector 30°	31200 lux / 2898 fc	15190 lux / 1411 fc	7300 lux / 678 fc	34800 lux / 3233 fc	16950 lux / 1575 fc	8170 lux / 759 fc
With RF-NL-L-45 Reflector 45°	12270 lux / 1140 fc	6381 lux / 593 fc	3168 lux / 294 fc	14070 lux / 1307 fc	7254 lux / 674 fc	3607 lux / 335 fc
With RF-NL-L-60 Reflector 60°	8118 lux / 754 fc	4241 lux / 394 fc	2138 lux / 199 fc	9214 lux / 856 fc	4800 lux / 446 fc	2435 lux / 226 fc
With FL-35E (15°)	23070 lux / 2143 fc	11770 lux / 1093 fc	5799 lux / 539 fc	17810 lux / 1655 fc	13070 lux / 1214 fc	6425 lux / 597 fc
With FL-35E (46°)	6086 lux / 565 fc	3275 lux / 304 fc	1687 lux / 157 fc	6745 lux / 627 fc	3635 lux / 338 fc	1872 lux / 174 fc
With PJ-NLM-15-30 (15°)	10800 lux / 1003 fc	5159 lux / 479 fc	2438 lux / 226 fc	12400 lux / 1152 fc	5997 lux / 557 fc	2795 lux / 260 fc
With PJ-NLM-15-30 (30°)	6838 lux / 635 fc	3501 lux / 325 fc	1751 lux / 163 fc	7988 lux / 742 fc	4036 lux / 375 fc	2013 lux / 187 fc
Distance	10M	15M	20M	10M	15M	20M
With RF-NL-PB	19590 lux / 1820 fc	8861 lux / 823 fc	4991 lux / 464 fc	22420 lux / 2083 fc	10160 lux / 944 fc	5749 lux / 534 fc

Evoke 5000B



1. The world's first 5000W LED light with CCT range 2,700K-6,500K and ± 80 green/magenta adjustment
2. Outstanding color rendition with CRI/TLCI average 97/98
3. Innovative Nebula B4 Light Engine ensures excellent light quality
4. Remarkable illuminance 57,000 lux @5m (5600K, with 30° reflector), approaching that of a 9kW HMI or 24kW tungsten light
5. All-in-one design by integrating the lamp head, control unit, and power supply
6. Constructed with high-strength magnesium alloy and IP66-rated housing
7. Comprehensive wired and wireless control methods



CCT LOOP



INT LOOP



FLASH



PULSE



STORM



TV



PAPARAZZI



CANDLE/FIRE



BAD BULB



FIREWORK



EXPLOSION



WELDING



On-board



Remote Controller



NANLINK APP



DMX/RDM



CRMV



Art-Net/sACN



Wired Controller



NFC



Includes

Evoke 5000B × 1, Yoke × 1, AC Cable 2m × 1 (for 200V-240V countries/regions) or AC Cable 7.5m × 1 (for 100V-125V countries/regions), AC Aviation Plug × 1, RF-NL-L-30 Reflector 30° × 1, USB Flash Drive × 1, WC-EXT Wired Controller × 1, Connection Cable 8m × 1, AS-MB-1 Magnetic Base × 1, Carrying Bag (for Wired Controller) × 1, User Manual × 2 (Evoke 5000B+Wired Controller)

Model	Evoke 5000B
Rated Power	5000W (200V-240V) 5200W (100V-125V)
Input Voltage / Current	AC100V-240V/52A(Max) 50/60Hz
CCT	2,700K-6,500K (G/M±80)
CRI / TLCI	Average 97 / Average 98
TM-30	Rf: average 96 / Rg: average 102
Dimming	0.0%-100.0%, 0.1% increment
IP Rating	IP66
Control	On-board, Wired Controller, Nanlink App, Remote Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, NFC
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding
Product Size	Light Fixture (without COB protective cap): 556.7 × 457 × 420.9mm / 21.92 × 17.99 × 16.57" Yoke: 795.9 × 660 × 166mm / 31.33 × 25.98 × 6.54"
Product Weight	Light Fixture (without COB protective cap): 43.12kg / 95.06lb Yoke: 3.35kg / 7.39lb

Illumination (lux / fc)

CCT	3200K				5600K			
Distance	5M	10M	15M	20M	5M	10M	15M	20M
Light Only	6380 lux 593 fc	1770 lux 164 fc	646 lux 60 fc	363 lux 34 fc	7720 lux 717 fc	2137 lux 199 fc	778 lux 72 fc	437 lux 41 fc
With RF-NL-L-15 Reflector 15°	95100 lux 8835 fc	23480 lux 2181 fc	10180 lux 946 fc	5776 lux 537 fc	118700 lux 11027 fc	29200 lux 2713 fc	12030 lux 1118 fc	6800 lux 632 fc
With RF-NL-L-30 Reflector 30°	47600 lux 4422 fc	11200 lux 1040 fc	4500 lux 418 fc	2565 lux 238 fc	57000 lux 5295 fc	13880 lux 1289 fc	5440 lux 505 fc	3010 lux 280 fc
With RF-NL-L-45 Reflector 45°	19780 lux 1838 fc	5080 lux 472 fc	1968 lux 183 fc	1072 lux 100 fc	24020 lux 2231 fc	6220 lux 578 fc	2351 lux 218 fc	1302 lux 121 fc
With RF-NL-L-60 Reflector 60°	13160 lux 1223 fc	3570 lux 332 fc	1341 lux 125 fc	721 lux 67 fc	16140 lux 1499 fc	4360 lux 405 fc	1581 lux 147 fc	870 lux 81 fc
With FL-45E (16°)	66900 lux 6215 fc	16760 lux 1557 fc	6620 lux 615 fc	3640 lux 338 fc	79500 lux 7386 fc	19640 lux 1825 fc	7790 lux 724 fc	4300 lux 399 fc
With FL-45E (50°)	10700 lux 994 fc	2977 lux 277 fc	1110 lux 103 fc	608 lux 56 fc	12520 lux 1163 fc	3360 lux 312 fc	1287 lux 120 fc	713 lux 66 fc
With RF-NL-PB	122000 lux 11334 fc	28460 lux 2644 fc	12030 lux 1118 fc	6760 lux 628 fc	146100 lux 13573 fc	34500 lux 3205 fc	14490 lux 1346 fc	8110 lux 753 fc

Evoke 5C Accessories (Optional)

Modifiers						
 <i>AS-MD-EV5C</i> Magnetic Diffuser	 <i>AS-MSD-EV5C</i> Magnetic Soft Dome	 <i>FL-5</i> Magnetic Fresnel Lens	 <i>PJ-EV5C-15-35</i> Projection Attachment 15°-35°	 <i>MD-SBL-EV5C</i> Magnetic Spot Beam Lens	 <i>AS-M5-EV5C</i> Magnetic Snoot	 <i>BD-EV5C</i> Magnetic Barndoor
Mounting			Power		Control	
 <i>YK-EV5C</i> Magnetic Yoke	 5/8" Baby Pin with 1/4"-20 Thread	Coming soon	 <i>BT-BG-EV5C</i> Magnetic Battery Grip	 <i>AS-MSA-E27-EV5C</i> Magnetic E27 Socket Adapter	 <i>WS-MCR-EV5C</i> Magnetic CRMX Module	Coming soon
 <i>AS-MTS-EV5C</i> Magnetic Thermal Shield	 <i>AS-UH-EV5C</i> Underwater Housing					

Evolve 150C Accessories (Optional)

FE Mount Modifiers



RF-FE-PB
FE30 Parallel Beam
Reflector



RF-FE-25/45
FE Mount
Reflector 25°/45°



FL-12E
Motorized
Fresnel Lens 15°-35°



FL-12
Fresnel Lens



MD-DB-FE15
FE Mount
Diffusion Ball 15cm



BD-FE
FE Mount Barndoors

FM Mount Modifiers



PJ-FMM-10/19/36/50
FM Mount Projection Attachment
with 10°/19°/36°/50° Lens



PJ-FMM-18-36
FM Mount Projection
Attachment 18°-36°



PJ-FMM-AI
Adjustable Iris
Diaphragm for PJ-FMM



AS-GB-FMM-SET1/SET2
FM Mount Projection
Attachment GOBO Set 1/Set 2



LT-FMM-60
Lantern Softbox 60cm



SB-FM-RP60
Rapid 60
FM Mount Softbox

Others



AS-BP-QRS
5/8" Baby Pin with
Quick Release Plate



AS-EXT-DMX
DMX Extension Adapter



AS-EXT-LAN
LAN Extension Adapter



WC-EXT
Wired Controller

Evoked 600C Accessories (Optional)

BE Mount Modifiers



RF-BE-PB
BE55 Parallel Beam
Reflector



RF-BE-25
BE Mount Reflector 25°



RF-BE-45
BE Mount Reflector 45°



FL-22E
Motorized Fresnel
Lens 15°-50°



MD-DB-BE20
BE Mount Diffusion
Ball 20cm



BD-BE
BE Mount Barndoors

Bowens Mount Modifiers



FL-20G
Fresnel Lens



PJ-BM-19/36
Bowens Mount Projection
Attachment with 19°/36° Lens



PJ-BM-AI
Adjustable Iris
Diaphragm for PJ-BM



AS-GB-B-SET1/SET2
Bowens Mount Projection
Attachment GOBO Set 1/Set 2




BDR-BM-40/70
BM40/70 Beauty
Dish Reflector



LT-80/120
Lantern Softbox
80cm/120cm



SB-FM-PR60
Rapid 60 FM Mount
Softbox (with AS-SR-BM)



SB-RP90/120
Rapid 90/120
Parabolic Softbox



SB-PR-150-Q
Parabolic Softbox 150cm
(quick release)



SB-ST-140x30
Strip Softbox
140x30cm



SB-AS-110x45
Asymmetric Softbox
110x45cm

Others



BT-BPS-EVM
V-mount Battery Power Station



AS-NLA-BE
NL to BE Mount Adapter
(for mounting NL mount modifiers)



AS-EXT-LAN
LAN Extension Adapter



AS-EXT-DMX
DMX Extension Adapter

Evoke Accessories (Optional)

NL Mount Modifiers									
Model	 RF-NL-PB NL70 Parallel Beam Reflector	 RF-NLM-26 26° Reflector	 RF-NLM-45 45° Reflector	 RF-NLM-60 60° Reflector	 RF-NL-L-15 15° Reflector	 RF-NL-L-30 30° Reflector	 RF-NL-L-45 45° Reflector	 RF-NL-L-60 60° Reflector	 FL-28 Fresnel lens
Evoke 600C (with AS-NLA-BE)	×	×	×	×	√	√	√	√	√
Evoke 900C / 1200B	√	√	√	√	×	×	×	×	√
Evoke 2400B	√	×	×	×	√	√	√	√	√ *up to 1200W
Evoke 5000B	√	×	×	×	√	√	√	√	√ *up to 1200W
Model	 FL-35-PD Pole Operated Fresnel Lens	 FL-35YK Fresnel lens	 FL-35E Motorized Fresnel Lens 15°-46°	 FL-45E Motorized Fresnel Lens 16°-50°	 PJ-NLM-15-30 NL Mount Projection Attachment 15-30°	 A5-PJA-EV Projection Adapter for Evoke Fixtures	 PJ-NLM-AI Adjustable Iris Diaphragm for PJ-NLM-15-30	 A5-GB-A-SET1/SET2 NL Mount Projection Attachment GOBO Set 1/Set 2	 SB-NLM-100-5 Square Softbox 100cm
Evoke 600C (with AS-NLA-BE)	×	×	×	×	√	√	√	√	√
Evoke 900C / 1200B	√	√	×	×	√	√	√	√	√
Evoke 2400B	×	×	√	×	√	√	√	√	√
Evoke 5000B	×	×	√ *up to 2400W	√	√ *up to 2400W	√ *up to 2400W	√ *up to 2400W	√ *up to 2400W	√
Model	 SB-NLM-120-PR Parabolic Softbox 120cm	 SB-NLM-150-PR Parabolic Softbox 150cm	 SB-NLM-150-O Octagonal Softbox 150cm	 SB-05-NL SNAPBAG Octa5' Shallow Soft with NL Mount	 LT-NLM-120 Lantern Softbox 120cm	 LT-NLM-180 Lantern Softbox 180cm	 BD-NLM Barndoor for Evoke with NL Mount	 BD-NLM II NL Mount Barndoors	
Evoke 600C (with AS-NLA-BE)	√	×	×	×	√	×	√	√	
Evoke 900C / 1200B	√	√	√	√	√	√	√	√	
Evoke 2400B	√	√	√	√	√	√	√	√	
Evoke 5000B	√	√	√	√	√	√	√	√	

Others									
Model	 A5-EXT-LAN LAN Extension Adapter	 A5-EXT-DMX DMX Extension Adapter	 WC-LM6P-C1 Wired Controller	 WC-EXT Wired Controller	 A5-NL-BMSB NL-Bowens Mount Softbox Adapter	 A5-PJA-NLM NL Mount Projection Adapter	 A5-CGA-EV2400 Center of Gravity Adjuster	 YK-EV1200-DB Yoke with Disc Brake	 YK-E-EVL Motorized Yoke-L
Evoke 600C	√	√	×	√	×	√	×	×	×
Evoke 900C / 1200B	×	×	√	×	√	√	×	√	×
Evoke 2400B	×	×	√	×	×	×	√	×	√
Evoke 5000B	√	√	√	√	×	×	×	×	√
Model	 FR-JP-2 Two-light Frame with Junior Pin	 FR-JP-4 Four-light Frame with Junior Pin	 FR-EV-4-HYK Four-light Frame with Yoke	 YK-DH-EVL Evoke 5000B Dual-Head Yoke	 A5-SK-EV2400 Skid	 CB-EV1200-10M/12M Connection Cable 10M/12M	 CB-EV2400-1M/12M DC Connection Cable 1M/12M	 CB-EV2400-AC-ED5 3.5M AC Cable with Edison Connector	 CB-EV2400-AC-JP 3.5M AC Cable with Japanese Connector
Evoke 600C	×	×	×	×	×	×	×	×	×
Evoke 900C / 1200B	√	√	×	×	×	√	×	×	×
Evoke 2400B	√	×	√	×	√	×	√	√	√
Evoke 5000B	×	×	×	√	×	×	×	×	×
Model	 CB-EV5000-AC-SK 7.5m AC Cable with Schuko Plug (EU Plug)	 A5-CP-EV1200/EV2400 DC Extension Cable Coupler	 CC-ST-EV1200-B CC-ST-EV900C* Trolley Case	 CC-EV2400-ST-PS/FO Trolley Case	 CC-EV1200-FT Flight Case	 CC-EV1200-FL-YK-FT Flight Case with FL-35YK	 CC-EV2400-FT-FO Flight Case	 CC-EV2400-FT Flight Case with 45° Reflector	 CC-EV5000-FT Flight Case
Evoke 600C	×	×	×	×	×	×	×	×	×
Evoke 900C / 1200B	×	√	√ *for Evoke 900C	×	√	√	×	×	×
Evoke 2400B	×	√	×	√	×	×	√	√	×
Evoke 5000B	√ * up to 3000W	×	×	×	×	×	×	×	√

Evoke Accessories (Optional)



RF-FE-PB
FE30 Parallel Beam Reflector

The FE30 parallel beam reflector offers a narrow beam angle of 8°, delivering powerful parallel beam and boosting brightness by 12 times compared to the Evoke 150C without any modifier at 3m. The lightweight design ensures balance when attached to the fixture. It features IP66 protection, ensuring reliable dust and water resistance for outdoor use.

Compatible products: FE mount, FM mount light fixtures

Product Size: $\Phi 330 \times 336\text{mm}$ / $\Phi 12.99 \times 13.23"$

Product Weight: 1.38kg / 3.04lb



FL-12
Fresnel Lens

With a zoom range of 15°-30°, the beam angle of this Fresnel Lens can be adjusted by rotating the zoom ring when it is mounted on the lamp head. Its ultra-slim design keeps the fixture compact and easy to rig in tight spaces. It features IP66 protection, ensuring reliable dust and water resistance for outdoor use.

Compatible products: FM mount, FE mount light fixtures

Product Size: $154 \times 64\text{mm}$ / $6.06 \times 2.52"$

Product Weight: 0.38kg / 0.84lb



Evoke Accessories (Optional)



FL-12E

Motorized Fresnel Lens 15°-35°

The motorized Fresnel lens features a 15°-35° zoom range. When mounted on the lamp head, the beam angle can be adjusted by the button on the Fresnel lens, lamp head menu, Nanlink App, wired controller (WC-EXT), DMX, or LumenRadio CRMX. With an IP66 rating, it ensures reliable dust and water resistance for outdoor use.

Compatible products: FE mount light fixtures

Product Size: 151 × 178 × 184mm / 5.94 × 7.01 × 7.24"

Product Weight: 1.01kg / 2.23lb



MD-DB-FE15/BE20

FE Mount Diffusion Ball 15cm/

BE Mount Diffusion Ball 20cm

Compact and lightweight, these diffusion balls are ideal to supplement ambient light. They diffuse point light into a wide hemispherical output, reduce harsh shadows, and create even illumination. IP66-rated for demanding on-set environments.

Compatible products: FM mount, FE mount light fixtures (MD-DB-FE15);

Bowens mount, BE mount light fixtures (MD-DB-BE20)

Product Size: $\Phi 150.5 \times 160.3\text{mm}$ / $\Phi 5.93 \times 6.31\text{"};$ $\Phi 200 \times 233\text{mm}$ / $\Phi 7.87 \times 9.17\text{"};$

Product Weight: 0.13kg / 0.287lb; 0.23kg / 0.507lb



Evoke Accessories (Optional)



RF-BE-PB


BE55 Parallel Beam Reflector

The BE55 parallel beam reflector offers a narrow beam angle of 8°, delivering powerful parallel beam and boosting brightness by 23 times compared to the Evoke 600C without any modifier at 5m. The lightweight design ensures balance when attached to the fixture. It features IP66 protection, ensuring reliable dust and water resistance for outdoor use.

Compatible products: BE mount, Bowens mount light fixtures of 800W or less (recommended ambient temperatures $\leq 35^{\circ}\text{C}$ when used with Forza 720/720B)

Product Size: $\Phi 603.2 \times 471\text{mm}$ / $\Phi 23.75 \times 18.54"$

Product Weight: 5.56kg / 12.26lb



AS-NLA-BE

NL to BE Mount Adapter

The adapter enables the BE mount and Bowens mount light fixtures to be compatible with NL mount accessories, expanding compatibility within existing lighting setups. When installing light fixtures and modifiers with electronic contacts, ensure that the electronic contacts are properly aligned.

Compatible products: BE mount and Bowens mount light fixtures (not for FC-300B/500B/500C)

Product Size: $224.5 \times \Phi 185.1 \times 59.6\text{mm}$ / $8.84 \times \Phi 7.29 \times 2.35"$

Product Weight: 0.44kg / 0.97lb



Evoke Accessories (Optional)



FL-22E

Motorized Fresnel Lens 15°-50°

The motorized Fresnel lens features a 15°-50° zoom range. When mounted on the lamp head, the beam angle can be adjusted by the button on the Fresnel lens, lamp head menu, Nanlink App, wired controller (WC-EXT), DMX, or LumenRadioCRMX. With an IP66 rating, it ensures reliable dust and water resistance for outdoor use.

Compatible products: BE mount, Bowens mount light fixtures of 800W or less (not for FC-300B / 500B / 500C)

Product Size: 311 × 296 × 265mm / 12.24 × 11.65 × 10.43"

Product Weight: 3.94kg / 8.69lb



YK-E-EVL

Motorized Yoke-L

It offers dual-axis adjustment with a wide range—540° pan and 270° tilt. The magnesium alloy design ensures high payload capacity, while the self-locking mechanism prevents accidental sag. IP66-rated, it's a perfect match for all-weather fixtures.

Compatible products: Evoke 2400B/5000B

Product Size: 880 × 662 × 225mm / 34.65 × 26.06 × 8.86"

Product Weight: 16.56kg / 36.51lb



Evoke Accessories (Optional)



FL-35YK
Fresnel Lens

The specially designed fresnel with NL Mount, with a center-mounted yoke offers a more balanced orientation plus a non-rosette locking hinge allowing for a smooth tilt movement. Providing smooth focusing of the light's beam spread from 11°-45°.

Product Size: 570.8 × 310.3 × 717.4mm / 22.47 × 12.22 × 28.24"

Product Weight: 10.84kg / 23.90lb



YK-EV1200-PO / FL-35-PO

Pole-Operated Yoke/Pole Operated Fresnel Lens

Includes 3 drive knobs for focusing and pan/tilt adjustment. When connected with a separately purchased pole, adjustments can be made on the ground when the lights are rigged up high.

YK-EV1200-PO

Product Size: 853 × 527 × 251mm / 33.58 × 20.75 × 9.88"

Product Weight: 8.55kg / 18.85lb

FL-35-PO

Product Size: 848 × 544 × 337mm / 33.39 × 21.42 × 13.27"

Product Weight: 16.14kg / 35.58lb

Evoke Accessories (Optional)




FL-28
Fresnel Lens

The compact and portable FL-28 Fresnel lens is designed for NL mount fixtures, after rigorous optical design, under the premise of maintaining high illumination output and good compatibility. With 17° to 43° adjustable range, and 60% less in size compared with the existing FL-35 Fresnel lens, it provides great convenience for mounting. (*The power output of Evoke 2400B will be reduced to about 50%.)

Product Size: 422.3 × 360.6 × 226.4mm / 16.63 × 14.20 × 8.91"

Product Weight: 3.86kg / 8.51lb

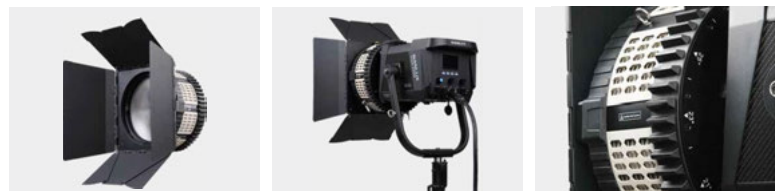

FR-JP-2/4, FR-EV-4-HYK
Two-light/Four-light Frame with Junior Pin
Four-light Frame with Yoke

The two-light frame is designed for mounting two Evoke fixtures, while the four-light frames are for four Evoke fixtures. Both aim to enhance brightness and provide wider light coverage. The four-light frame with yoke supports 360° tilting with an adjusting handle.

FR-JP-2 (for Evoke 900C/1200/1200B/2400B)

Product Size: 759 × 102 × 231mm / 29.88 × 4.02 × 9.09"

Product Weight: 3.2kg / 7.05lb

FR-JP-4 (for Evoke 900C/1200/1200B)

Product Size: 1489 × 122 × 1751mm / 58.62 × 4.8 × 68.94"

Product Weight: 27.5kg / 60.63lb

FR-EV-4-HYK (for Evoke 2400B)

Product Size: 1195.5 × 1213.5 × 384.5mm / 47.07 × 47.78 × 15.14"

Product Weight: 61.5kg / 135.58lb

Evoke Accessories (Optional)



FL-35E

Motorized Fresnel Lens 15°-46°

The Fresnel lens features precise motorized zoom adjustment, with a range from 15° to 46°. It is designed for NL mount fixtures with electronic contacts, delivering a remarkable illuminance of 75,700 lux at 15° with the Evoke 2400B at 3m. Built with an IP55 rating, it ensures weather resistance. Its control options include both on-board and wireless methods.

Product Size: 430.38 × 490.15 × 330.3mm / 16.94 × 19.30 × 13.00"

Product Weight: 10kg / 22.05lb



FL-45E

Motorized Fresnel Lens 16°-50°

The FL-45E features a 16°-50° zoom range, adjustable via lens buttons, light fixtures, wired control (wired controller, DMX, Ethernet), or wireless control (Nanlink App 2.0, LumenRadio CRMX). With IP55 protection and efficient cooling, it is built for reliable use in demanding environments.

Product Size: 563 × 578 × 342mm / 22.17 × 22.76 × 13.46"

Product Weight: 12.25kg / 27.01lb



Evoke Accessories (Optional)



PJ-NLM-15-30

NL Mount Projection Attachment 15°-30°

The projection attachment features a zoom range of 15° to 30°, efficient light transmission, and enhanced illuminance for the light fixture. Its lens barrel supports a 90° rotation range, and the 15° offset yoke allows for a larger downward angle while maintaining stability. It is also compatible with ETC barrels and lenses, providing wider applicability.

Product Size:

extended at 15°: 629.5 × 392.5 × 514.7mm / 24.78 × 15.45 × 20.26"

retracted at 30°: 451.5 × 392.5 × 514.7mm / 17.78 × 15.45 × 20.26"

Product Weight: 11.85kg / 26.12lb



RF-NL-PB

NL70 Parallel Beam Reflector

The NL70 parallel beam reflector offers a close-to-6° beam angle, enhancing brightness by 21 times compared to the Evoke 2400B bare light @10m. Weighing only 9.37kg, it is easy for one person to handle, while its straightforward snout installation ensures quick setup. Its dust-resistant and rainproof optical cover provides robust durability in various environments.

Product Size: with snout installed: $\Phi 774 \times 710.8\text{mm}$ / $\Phi 30.5 \times 28.0"$

with snout retracted: $\Phi 774 \times 499\text{mm}$ / $\Phi 30.5 \times 19.6"$

Product Weight: 9.37kg / 20.66lb



Evoke Accessories (Optional)



AS-PJA-EV

Projection Adapter for Evoke Fixtures

Designed for the NL mount fixtures, it enables compatibility with ETC barrels and lenses. Two adjustable handles ensure secure locking, even with a heavy projection attachment mounted. The yoke's 15° offset design allows for a larger downward angle on a light stand.

Product Size: 447 × 148.67 × 524.17mm / 17.6 × 5.9 × 20.6"

Product Weight: 4.724kg / 10.41lb



YK-DH-EVL

Evoke 5000B Dual-Head Yoke

Designed for mounting two Evoke 5000B fixtures with their reflectors, it enables synchronized tilting of both fixtures with 360° adjustment. Angle markings allow for easy alignment across multiple fixtures.

Product Size: 769 × 1003 × 117mm / 30.28 × 39.49 × 4.61"

Product Weight: 7.9kg / 17.42lb



Evoke Accessory (Optional)



WC-LM6P-C1
6 Pin Wired Controller

With three buttons and three knobs, its control panel replicates the fixture's interface, allowing users to remotely control the fixture using the same operating logic. The included connection cable features a 6-pin self-latching aviation connector on both ends, along with an additional USB connector.

Compatible products: Evoke 900C/1200B/2400B/5000B
Product Size: 142.5 × 120.5 × 40mm / 5.61 × 4.74 × 1.57"
Product Weight: 0.29kg / 0.64lb



WC-EXT
Wired Controller


It has a control panel that replicates the fixture's interface, allowing users to remotely control the fixture using the same operating logic. The IP66-rated housing ensures reliable operation even in severe weather conditions. A rear magnetic design enables attachment to metal surfaces or a magnetic base installed on the fixture.

Compatible products: Evoke 5000B (included), Evoke 600C (included), Evoke 150C
Product Size: 149.9 × 121.7 × 41mm / 5.90 × 4.79 × 1.61"
Product Weight: 0.493kg / 1.09lb



Matrix Series LED Multi-source Spot Light

Modular · Expandable

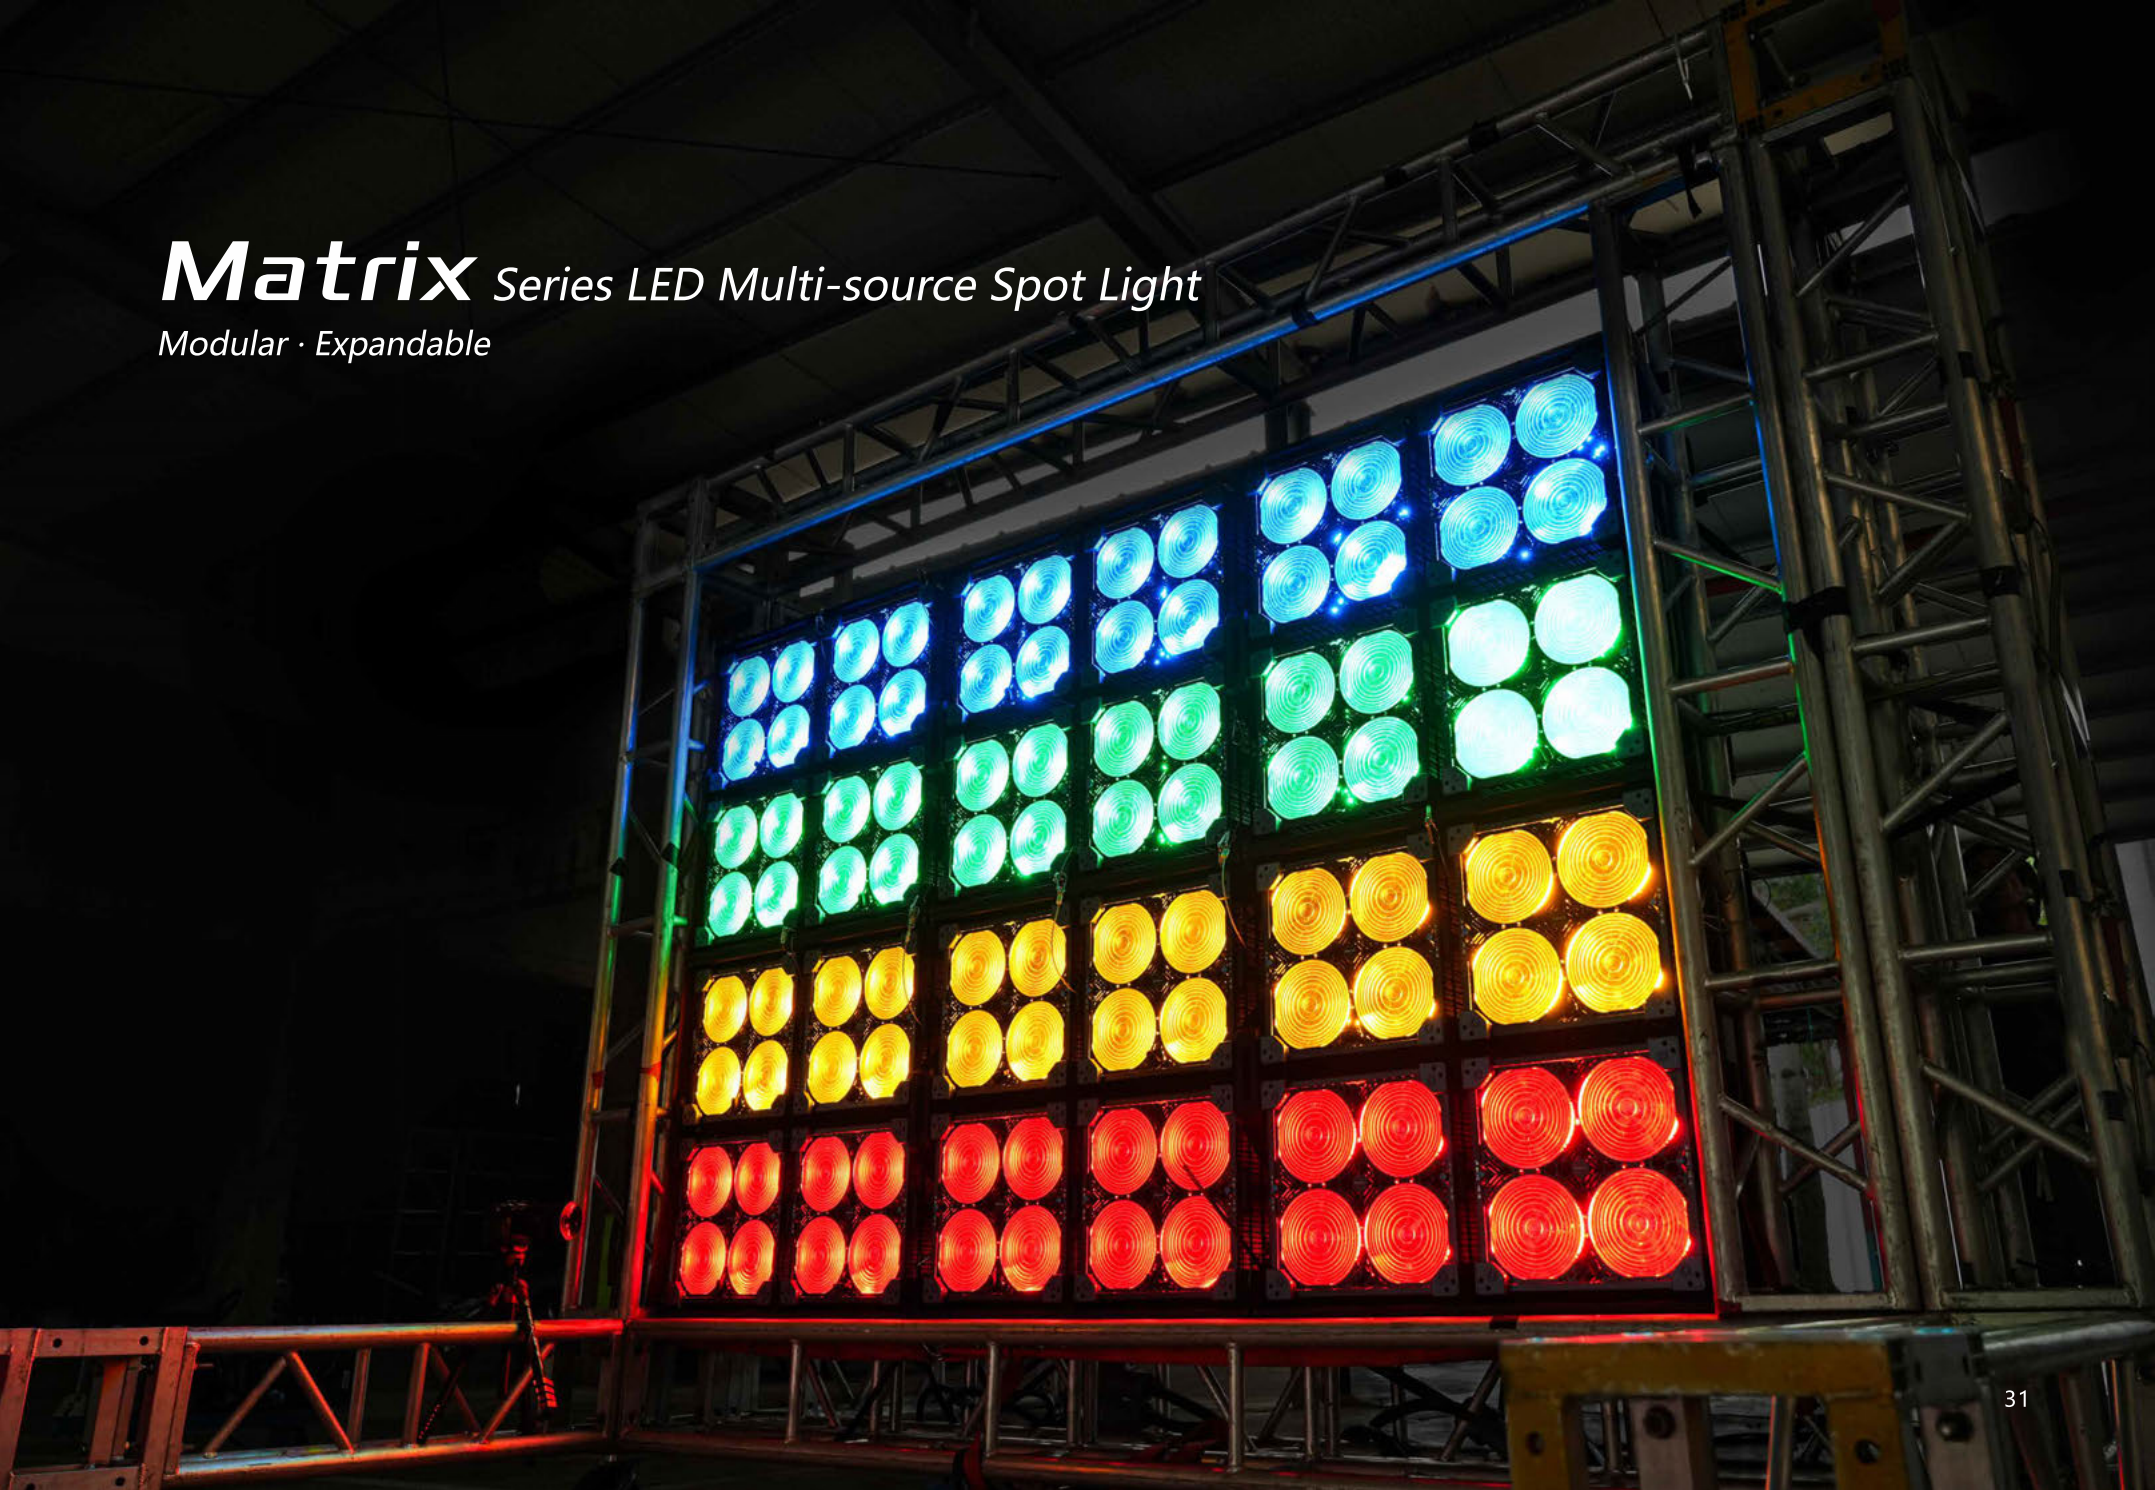

Matrix 2500B / 2500C



1. 2500W integrated four-head fixtures designed for multi-unit lighting arrays
2. High illuminance 103,000 lux (Matrix 2500B) / 67,900 lux (Matrix 2500C) @3m, 5600K with included Motorized Fresnel Lens at 16°
3. Wide CCT range 2,700K-6,500K with G/M±80 (Matrix 2500B) and 1,000K-20,000K with G/M±200 (Matrix 2500C)
4. Compact form factor of 40×40×23.5 cm (15.75×15.75×9.25 in)
5. All-in-one design, high-strength magnesium alloy and IP66-rated housing
6. Efficient cooling with front-to-rear airflow



*HUE LOOP



CCT LOOP



INT LOOP



FLASH



PULSE



STORM



*POLICE CAR



TV



CANDLE/FIRE



*DISCO



BAD BULB



PAPARAZZI



FIREWORK



EXPLOSION



WELDING

*Matrix 2500C only



On-board



Remote Controller



Wired Controller



NANLINK APP



DMX/RDM



CRM



Art-Net/sACN



NFC

Accessories (Optional)



SB-MT25-0

Matrix 2500 Octagonal Softbox



YK-DH-MT25

Matrix 2500 Dual-Head Yoke



FR-MT25-4

Matrix 2500 Four-light Frame

Includes

Matrix 2500B/2500C × 1, Yoke × 1, FL-MT25 Motorized Fresnel Lens × 1, *AC Power Cable 7.5m × 1, User Manual × 1

(*for 200V-240V countries/regions: AC Power Cable; 100V-125V countries/regions: AC Power Cable with bare ends & AC Cable with Edison Connector)

Flight Case Kit: Matrix 2500B/2500C × 1, Yoke × 1, FL-MT25 Motorized Fresnel Lens × 1, *AC Power Cable 7.5m × 1, User Manual × 1, Flight Case × 1 (*same as above)



Matrix Technical Data

Model	Matrix 2500B	Matrix 2500C
Rated Power	2500W	
Input Voltage / Current	AC100-240V/50-60Hz, 28A	
CCT	2,700K-6,500K (G/M±80)	1,000K-20,000K (G/M±200)
CRI / TLCI	Average 98 / Average 98	
TM-30	Rf: Average 95 / Rg: Average 100	Rf: Average 96 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment	
IP Rating	IP66	
Control	On-board, Remote Controller, Wired Controller, NANLINK App, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, NFC	
Product Size	Light Fixture: 399 × 399 × 234mm / 15.71 × 15.71 × 9.21" Yoke: 576 × 569 × 98mm / 22.68 × 22.4 × 3.86"	
Product Weight	Light Fixture: 17kg / 37.48lb Yoke: 2.25kg / 4.96lb	Light Fixture: 18.5kg / 40.79lb Yoke: 2.25kg / 4.96lb

Illumination (lux / fc)

	CCT	Matrix 2500B		Matrix 2500C				
		3200K	5600K	3200K	5600K	R	G	B
Light Only	3M	11390 lux / 1058 fc	13470 lux / 1251 fc	8570 lux / 796 fc	9570 lux / 889 fc	1254 lux / 116 fc	4890 lux / 454 fc	823 lux / 76 fc
	5M	4320 lux / 401 fc	5120 lux / 476 fc	3230 lux / 300 fc	3650 lux / 339 fc	475 lux / 44 fc	1844 lux / 171 fc	311 lux / 29 fc
	7M	2240 lux / 208 fc	2651 lux / 246 fc	1673 lux / 155 fc	1897 lux / 176 fc	247 lux / 23 fc	953 lux / 89 fc	160 lux / 15 fc
With FL-MT25 (16°)	3M	86900 lux / 8073 fc	103000 lux / 9569 fc	60500 lux / 5620 fc	67900 lux / 6308 fc	8650 lux / 804 fc	33600 lux / 3121 fc	5950 lux / 553 fc
	5M	32300 lux / 3001 fc	38200 lux / 3549 fc	21500 lux / 1997 fc	24590 lux / 2284 fc	3140 lux / 292 fc	12140 lux / 1128 fc	2187 lux / 203 fc
	7M	16400 lux / 1524 fc	19450 lux / 1807 fc	11100 lux / 1031 fc	12530 lux / 1164 fc	1603 lux / 149 fc	6120 lux / 569 fc	1098 lux / 102 fc
With FL-MT25 (48°)	3M	21310 lux / 1980 fc	25240 lux / 2345 fc	14500 lux / 1347 fc	16300 lux / 1514 fc	2165 lux / 201 fc	8370 lux / 778 fc	1432 lux / 133 fc
	5M	7990 lux / 742 fc	9470 lux / 880 fc	5390 lux / 501 fc	6110 lux / 568 fc	758 lux / 70 fc	3090 lux / 287 fc	533 lux / 50 fc
	7M	4200 lux / 390 fc	4990 lux / 464 fc	2828 lux / 263 fc	3200 lux / 297 fc	393 lux / 37 fc	1619 lux / 150 fc	278 lux / 26 fc
Four Light With FL-MT25 (16°)	5M	109600 lux / 10182 fc	129700 lux / 12049 fc	77500 lux / 7200 fc	86300 lux / 8017 fc	10260 lux / 953 fc	42400 lux / 3939 fc	7480 lux / 695 fc
	10M	29900 lux / 2778 fc	35400 lux / 3289 fc	20750 lux / 1928 fc	23050 lux / 2141 fc	2700 lux / 251 fc	11280 lux / 1048 fc	2028 lux / 188 fc
	15M	13540 lux / 1258 fc	16060 lux / 1492 fc	9250 lux / 859 fc	10260 lux / 953 fc	1243 lux / 115 fc	5100 lux / 474 fc	913 lux / 85 fc
Four Light With FL-MT25 (48°)	5M	29900 lux / 2778 fc	35400 lux / 3289 fc	20710 lux / 1924 fc	23050 lux / 2141 fc	2711 lux / 252 fc	11600 lux / 1078 fc	2018 lux / 187 fc
	10M	7750 lux / 720 fc	9160 lux / 851 fc	5200 lux / 483 fc	5810 lux / 540 fc	678 lux / 63 fc	2922 lux / 271 fc	511 lux / 47 fc
	15M	3440 lux / 320 fc	4080 lux / 379 fc	2298 lux / 213 fc	2580 lux / 240 fc	306 lux / 28 fc	1301 lux / 121 fc	229 lux / 21 fc

Matrix Accessories (Optional)



FL-MT25

Motorized Fresnel Lens 16°-48° (included)



With an all-in-one design, all four lenses zoom simultaneously from 16° to 48° and can be controlled via the lens knob, fixture menu, wired controller, Nanlink App, DMX, CRMX, or Ethernet. IP66-rated for challenging environments.

Product Size: 400 × 400 × 185mm / 15.75 × 15.75 × 7.28"

Product Weight: 4.6kg / 10.14lb



YK-DH-MT25

Matrix 2500 Dual-Head Yoke



Designed for mounting two Matrix 2500B/2500C fixtures, it supports 360° tilt adjustment and synchronized tilting of both fixtures. Angle markings allow convenient alignment across multiple fixtures. The included EXT port cable connects the two fixtures for synchronized control.

Product Size: 750 × 916 × 167mm / 29.53 × 36.06 × 6.57"

Product Weight: 6.6kg / 14.55lb



FR-MT25-4

Matrix 2500 Four-light Frame



Designed for mounting four Matrix 2500B/2500C fixtures, and multiple frames can be combined. The included 4-way power distribution cable powers all four fixtures within the frame simultaneously. The EXT port cable enables synchronized control, allowing the entire setup to operate via a single control signal.

Product Size: 892 × 892 × 409mm / 35.12 × 35.12 × 16.1"

Yoke: 1140 × 850 × 166mm / 44.88 × 33.46 × 6.54"

Product Weight: 22.38kg / 49.34lb

Yoke: 7.09kg / 15.63lb




@ Tom Van den Abbeele, ICLS



From "She's Got No Name"




@ Wong Man Pan

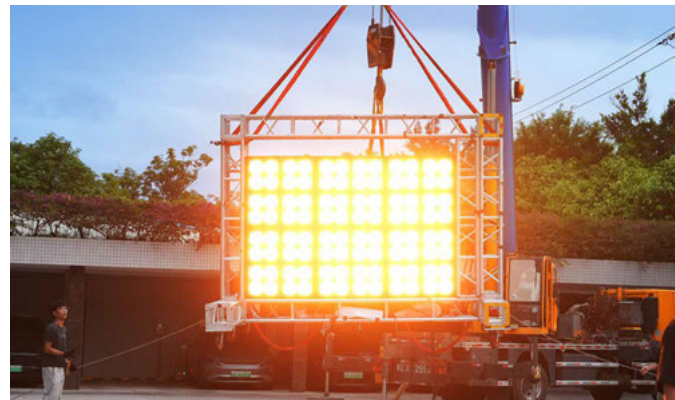

@ Victor Abadia




@ Shane Hurlbut, ASC

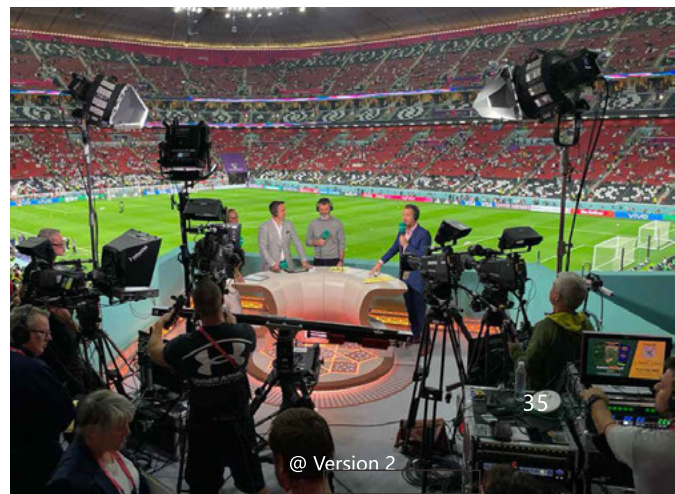


@ Version 2



From "Blades of the Guardians"

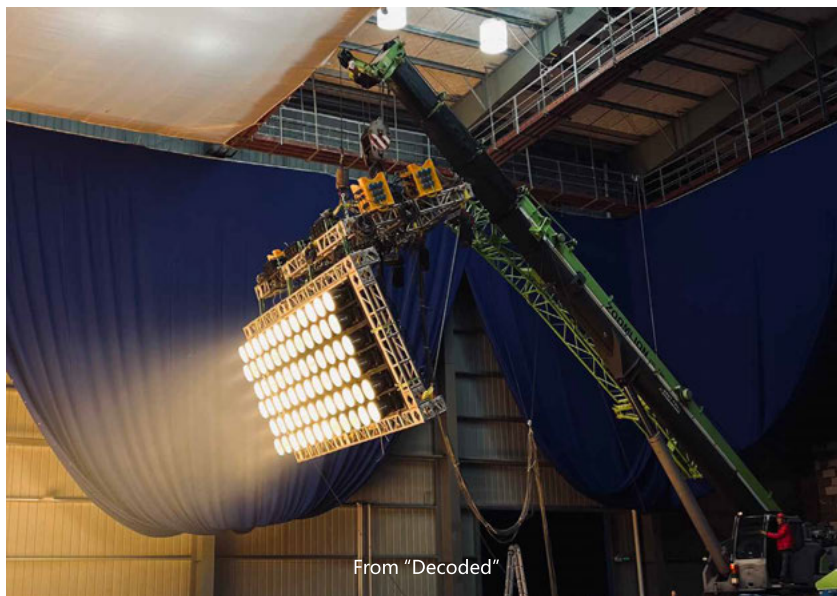

From "Decoded"

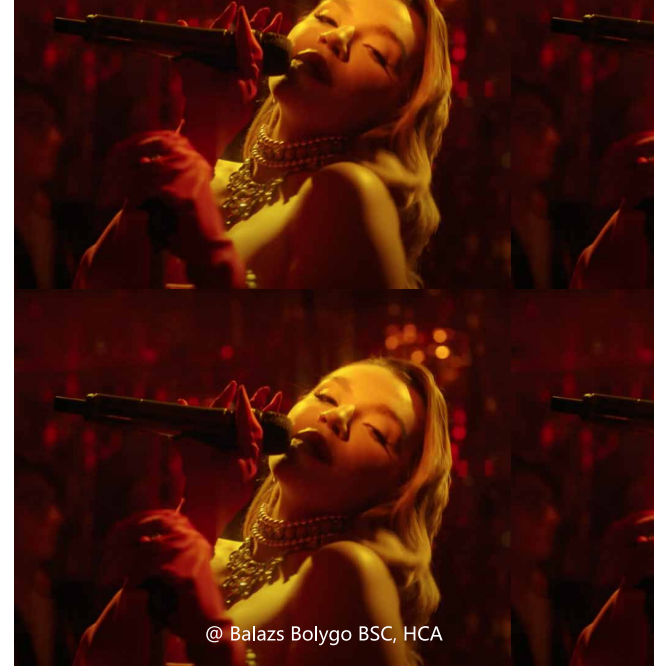

@ Balazs Bolygo BSC, HCA



@ Sidney Baucheron



From "Operation Hadal"



GUANGDONG NANGUANG PHOTO&VIDEO SYSTEMS CO., LTD.

Tel: +86-754-85751187 85310187

Fax: +86-754-85300887

E-mail: info@nanlux.com

Add: Dongli Section, Highway 324, Chenghai, Shantou City, Guangdong Province, China



www.nanlux.com



NANLINK APP
Download



NANLUX
Catalogue



NANLUX
Linktree

Official Distributor

KAISER[®] FOTOTECHNIK

Kaiser Fototechnik GmbH & Co. KG

Im Krötensteich 2 · 74722 Buchen · Germany

Tel.: +49(0)6281 4070

www.kaiser-fototechnik.de

info@kaiser-fototechnik.de

WEEE-Rg.-Nr. DE 34742207



Follow us:



Instagram



facebook



Die in diesem Prospekt beschriebenen Beleuchtungen und Lampen sind für die Ausleuchtung von Bildaufnahmen bestimmt und nicht für andere Anwendungen.